

LEDlink

wide4P 24V




LED MODULES

IP65

angle 170°

5 year warranty

efficiency 135 lm/W



SMALL DEPTH
LIGHT PROJECTS



CUSTOM
APPLICATIONS




SPECIAL
BEAM ANGLE

Typical applications: flat light boxes | flat channel letters | custom applications

The wide4P 24V is a highly compact outdoor module. It is ideal for ultra-slim light boxes, tension fabric systems, and channel letters. Installation depths from 60 mm to 200 mm are easily achievable. Equipped with a special 170° lens that directs light almost exclusively sideways, the wide4P 24V ensures extremely uniform illumination. With its IP65 protection rating, the module is perfectly suited for illuminated signage and tension fabric systems in outdoor applications.

DIMENSION [mm]

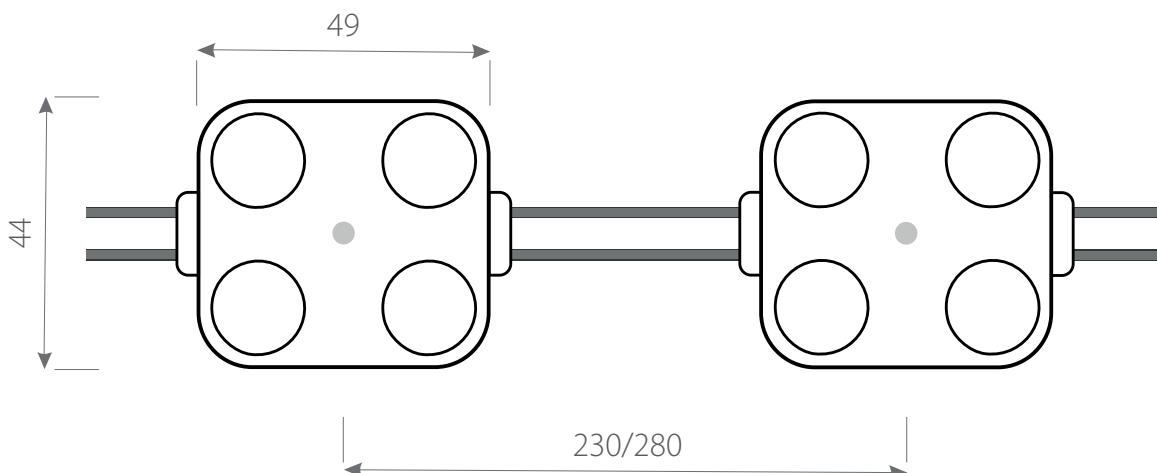

DC
24V

IP
65

170°

CE

Distributor:
STEJA lighting
www.steja.de



Date of file: September 17, 2025



www.ledlink.de
info@ledlink.de


TECHNICAL DATA

Type wide4P_{24V}

	W80K	W65K	W40K
Symbol	M155200X	M155170X	M155130X
Color	white 8000K	white 6500K	white 4000K
Voltage [V DC]	24V	24V	24V
Current [mA]	62,5	62,5	62,5
Power consumption [W]	1,5	1,5	1,5
Luminous flux [lm]	~200	~200	~200
Light output [lm/W]	135	135	135
Beam angle [°]	170	170	170
Degree of protection	IP65	IP65	IP65
Operating temperature [°C]	-35 - +60	-35 - +60	-35 - +60
LEDs	3030	3030	3030
Dimensions [mm]	49x44x8,5	49x44x8,5	49x44x8,5
LED quantity [pcs.]	4	4	4
Lifetime [h]	50.000	50.000	50.000
Warranty [mc]	60	60	60

X – indicates the distance between modules (center-to-center): no digit – 280 mm version, additional "1" – 230 mm version.

CONSTRUCTION

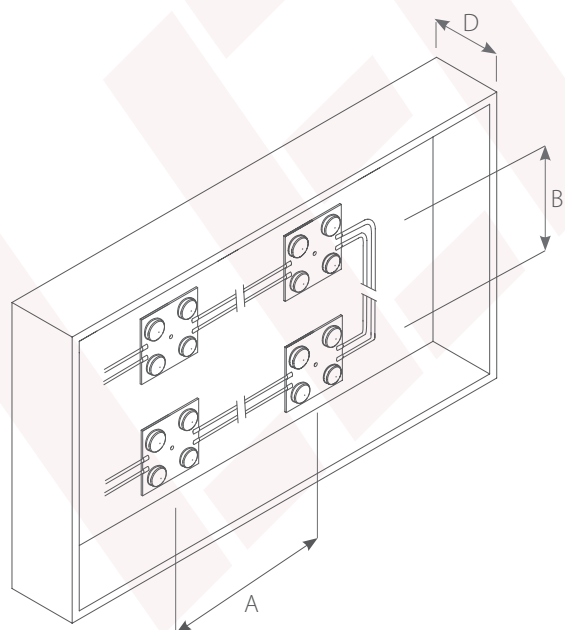

MOUNTING EXAMPLE *

D [mm]	A [mm]	B [mm]	Brightness [cd/m²]
60	150	150	1546
100	200	200	871
150	230	230	659
200	280	280	444

* The grid can change depending on the illuminated material

D - Depth

