








Typical applications: edge lighting in industry advertising | small spatial letters

LinkS<sub>300P</sub> RGB is a RGB stripe with 300 diodes per 5m roll. Thanks to the IP65 protection degree it is possible to mount it outdoors. It is excellent for very light lighting of light boxes, POS systems, furniture and elements of interior design. A separate RGB controller is required for proper operation. For larger projects an RGB amplifier must be added. Double-sided 3M™ industrial adhesive tape on the back is used for assembly. The LinkS<sub>300P</sub> RGB stripes are powered by 12 VDC and have a 3 year warranty.

## **DIMENSION** [mm]

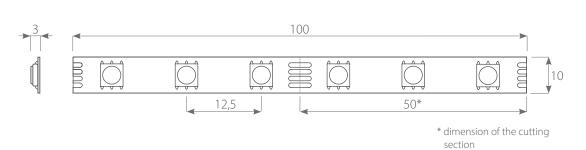

Distributor: STEJA lighting www.steja.de






## TECHNICAL DATA

Туре	LinkS <sub>300P</sub>
	RGB
Symbol	T121400
Color	multikolor RGB
Voltage [V DC]	12
Current [mA/1m]	1000 ~ 1200
Power consumption [W]	14,4 (±5%)
Luminous flux [lm]	-
Light output [lm/W]	-
Beam angle [°]	120
Protection degree	IP65
Color temperature [K]	-
Wavelength [µm]	R: 620 / G: 520 / B: 460
Operating temperature [°C]	-10 - +40
LEDs	SMD5060
LED quantity [pcs./m]	60
Partial [cm]	5
Lifetime [h]	30.000
Warranty [months]	36
Packing [m]	5

## CONSTRUCTION

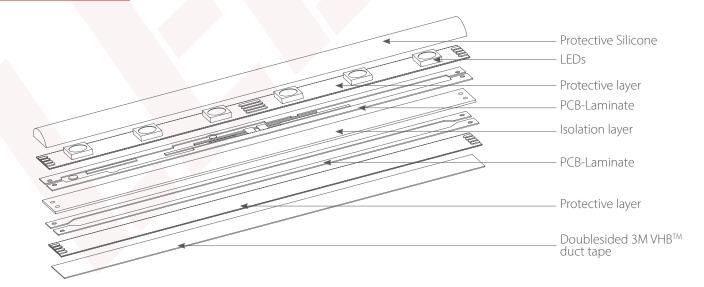

Supply method: The maximum length of the section fed in series is 5m.



